

43mm 24V High Decibel Piezoelectric Active Buzzer with Screw Holes CT E0042

Technical Specifications:


Product test conditions: temperature: 5 ~ 35 ° C, humidity: 45% ~ 85% R. H., air pressure: 860 ~ 1060hPa.

Standard test conditions: temperature: 25 ± 3 ° C, humidity: 60 ± 10% R. H. Air pressure: 860 ~ 1060 hPa.

1	Diameter	φ43.0
2	Net Weight	Approx 36g
3	Rated Voltage	24VDC
4	Operating Voltage	6~28 VDC
5	Rated Current	Max.20mA at 24VDC
6	Sound pressure output	Min. 105dB at 24VDC,10cm
7	Resonant frequency (Hz)	2800±500Hz
8	Tone	Continuous
9	Working temperature (°C)	-20??+70?
10	Storage temperature (°C)	-30??+80?

Size Chart

unit:mm

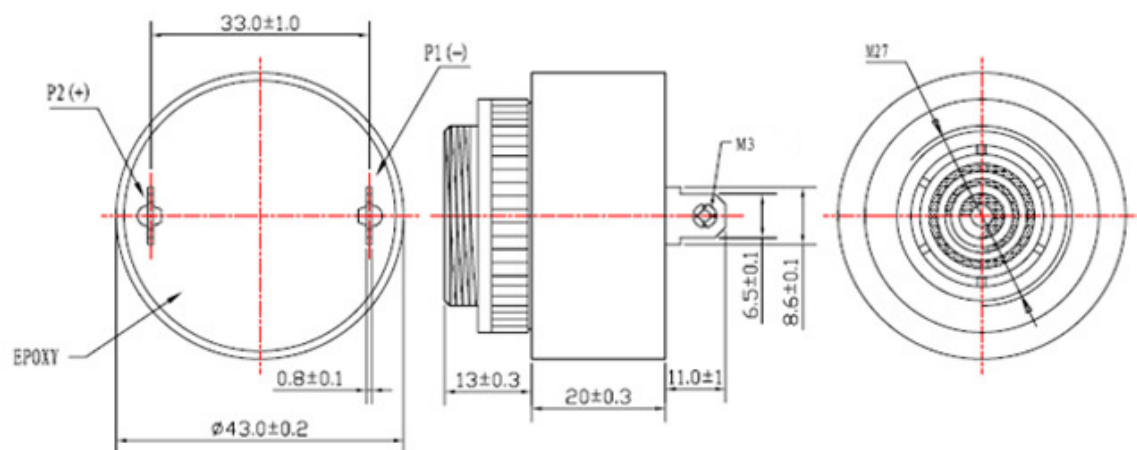

Product link : <https://www.gct-partszone.com/?p=2177>