
12V 24V 3-Pin LED Adjustable Car Flasher Flash Relay For Turn Signal Light 40A Blinker Flasher, Turn Lighting Relay CT E0026

-Suitable for flasher light during car turning?

-High sensitive and stable electronic timing?

-Wide operating voltage, temperature range and long life?

-Standard terminals, usage and Replacement easily?

-With ticking sound?

Technical Characteristics:

Rated Voltage: 12VDC?24VDC

Operating Voltage: 11VDC ~ 15VDC?22VDC ~ 30VDC

Test Voltage: 13VDC \pm 0.2VDC?26VDC \pm 0.4VDC

Test Temperature: 20? ± 2?

Switch Load: 0.1W ~ 150W (0.02A ~ 20A)

Max Power: 150W

Flashing Frequency: 60 ~ 120 times per minute


Duty Ratio: 30% ~ 70%

Operating Temperature: -40°C ~ +80°C

Life: 400 working hours

LxWxH(mm): 30.5x30.5x30

Weight: (Approx.)25g

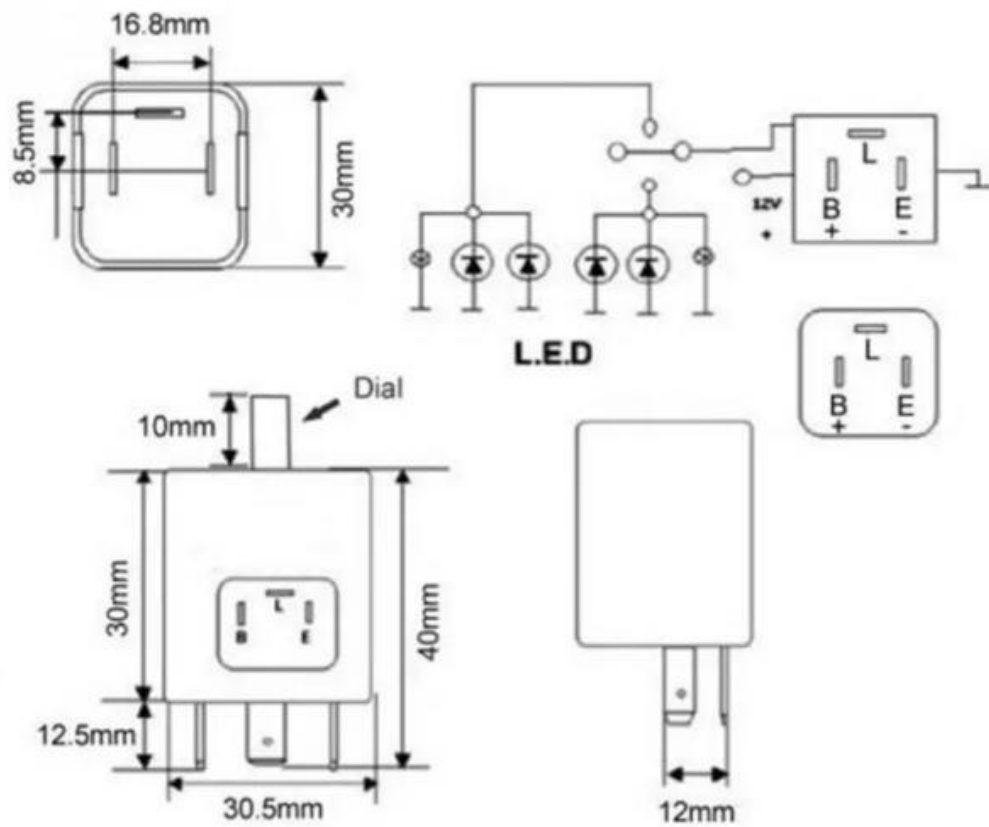

Product link : <https://www.gct-partszone.com/?p=2197>